

## 30 kW SSA Test for the KOMAC MEBT

Seong-Gu Kim\*, Kyung-Tae Seol, Hyeok-Jung Kwon, Han-Sung Kim, Young-Gi Song, Yong-Sub Cho  
KOMAC, Korea Atomic Energy Research Institute  
\*Corresponding author : ksgk2@kaeri.re.kr

### 1. Introduction

The 100 MeV proton accelerator is constructed in the KOMAC, KOMAC has been provided with the proton beam for the many industrial applications. In the 100 MeV proton linear accelerator (Linac) for KOMAC, the RF source will power two-accelerator cavities (an RFQ, a DTL1) operated at a frequency of 350 MHz [1]. The low level RF (LLRF) system for 100 MeV proton linear accelerator provides field control including an RFQ and a DTL at 350 MHz. In our system, an accelerating electric field stability of  $\pm 1\%$  in amplitude and  $\pm 1^\circ$  in phase is required for the RF system [2, 3]. Now a total of 9 RF systems are being operated. To improve the beam quality, the additional RF system for MEBT (Medium Energy Beam Transport) (Medium Energy Beam Transport) is needed. An addition of a MEBT RF system will reduce loss of beam quantity caused by gap between 20 MeV DTL tank and 100 MeV DTL tank. To this end, we have developed MEBT RF system, and test 30 kW SSA which is key element of the RF system.

### 2. MEBT RF System Design

MEBT RF system consists of FPGA controlling RF power amplitude and phase, 30 kW SSA amplifying RF power for MEBT tank and low-level RF (LLRF) analog chassis performing a clock and RF distribution, an up/down conversion, RF signal processing, and an interlock for the high power RF system protection.

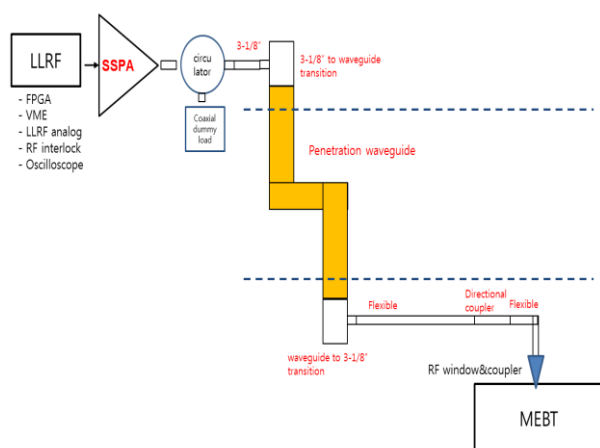


Figure 1: MEBT RF system

Figure 1 shows the overall system of RF system for MEBT. FPGA, VME, LLRF analog box, RF interlock box, Oscilloscope, 30 kW SSA are included in high

frequency control rack for MEBT. High power RF from high frequency control rack goes into MEBT, running through the cable and waveguide. Three main parts of high frequency control rack are FPGA controlling the size and the phase of the high frequency signal, the SSA amplifying signal and sending into the tank, and LLRF analog box, which plays the role of a bridge between FPGA and SSA. FPGA operates at 50 MHz, but the high frequency running into the tank is 350 MHz. The LLRF analog box converts the frequency by the 300 MHz of reference signal and providing the tank with appropriate power.

### 3. RF system Installation and RF power Test

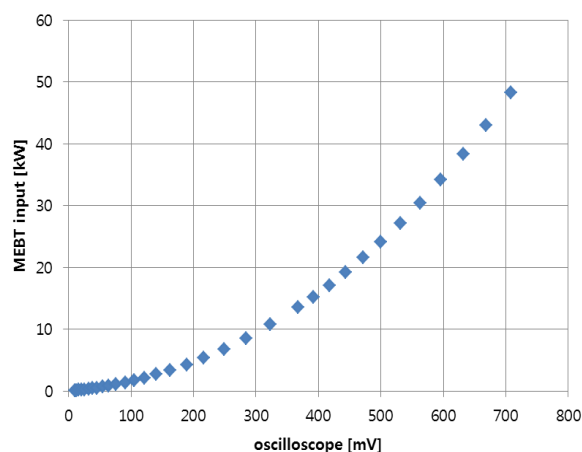


Figure 2: LLRF analog box calibration

RF control racks, helix cables and circulator were installed in the klystron gallery. Each RF control rack for MEBT includes FPGA, VME, LLRF analog box, RF interlock box, Oscilloscope and 30 kW SSA. After installation is complete, Transmission losses between tunnel and gallery were measured by Sending a signal generator signal from the tunnel to the gallery. Attenuation of the signals passing through helix cables and waveguides were about 2.0 ~ 2.2dB. Next, we calibrate LLRF analog box. Calibration results are shown in Figure 2.

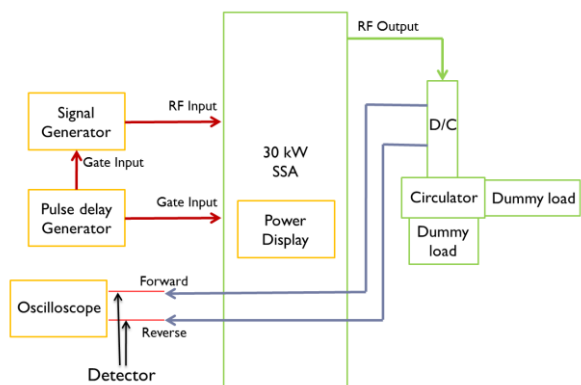


Figure 3: 30kW SSA test configuration



Figure 4: 30kW SSA test environment

Next, 30 kW SSA for the MEFT RF system were tested. First, the output was measured by powermeter as the input in the SSA increased slightly. In this test, the maximum output was 30 kW as seen in the Figure5. Then the operating status was checked for an hour on condition of both 1.5 ms, 50 Hz, output of 30 kW. The test results are Figure 5.

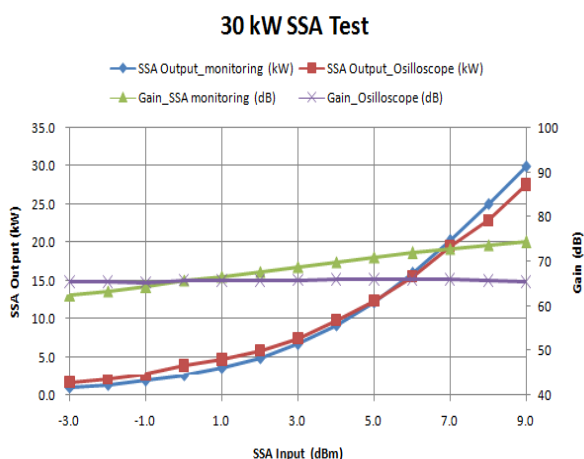


Figure 5: 30kW solid state amplifier test

#### 4. Conclusions

The transmission lines from the RF control rack to the MEFT tank were installed. RF system for MEFT is

being installed. LLRF analog and SSA have been tested. The condition of the test is 350 MHz, 9% pulse duty (1.5 ms, 60 Hz), 30 kW(peak power). Perfecting an RF system of MEFT will reduce loss of beam quantity caused by gap between 20 MeV DTL tank and 100 MeV DTL tank.

This work was supported by the Ministry of Science, ICT & Future Planning of the Korean Government.

#### REFERENCES

- [1] H. S. Kim, et al, "RF Characteristics of the PEFT DTL", Proceedings of EPAC 2006, Edinburgh.
- [2] H. J. Kwon, H. S. Kim, K. T. Seol and Y. S. Cho, J. Korean Phys. Soc. 48, 726 (2006).
- [3] K. T. Seol, H. J. Kwon, H.- J. Choi and Y. S. Cho, J. Korean Phys. Soc. 56, 1994 (2009).