

Study on stacking sequence on the flexural properties of basalt/carbon/epoxy hybrid composites using test and finite element analysis

S.H. Kim ^a, J.I. Lim ^a, K.Y. Rhee ^a, C.R. Choi ^b

^a .Department of Mechanical engineering, Kyung Hee University, Yongin, Korea 446-701

^b ELSOLTEC Inc., Yongin, Korea 446-982

*Corresponding author: rheeky@khu.ac.kr

1. Introduction

In recent years, basalt fiber has received increasing attention as a substitute for glass fiber on the basis of its ecologically benign and superior mechanical properties. Basalt fiber, which is made from basalt rock, has superior properties relative to glass fiber such as high tensile strength (~4800 MPa), thermal performance (-259°C to 960°C) and chemical resistance. Also, it is considerably more economical than carbon fiber. And the basalt vitrification process of nuclear waste is a viable alternative to glass vitrification. Basalt roving, chopped basalt fiber strands and basalt composite rebars can significantly increase the strength and safety characteristics of nuclear waste and spent nuclear fuel storages [1]. For this reason, basalt fiber is widely used in various industries and several studies have been carried out to understand the mechanical behavior of basalt fiber reinforced composites [2-5]. However, few studies have been made to specifically investigate the mechanical properties of basalt/carbon hybrid composites [6-7].

In this study, the effect of stacking sequence on the flexural properties of carbon/basalt/epoxy hybrid composites was investigated in order to verify the reliability of this composite model. Two types of carbon/basalt/epoxy hybrid composites with a sandwich form were fabricated: basalt skin-carbon core (BSCC) composites and carbon skin-basalt core (CSBC) composites. After fabrication flexural tests and finite element method (FEM) were conducted. FEM results of flexural analysis are compared with experimental results.

2. Materials and Methods

Flexural tests were performed according to the ASTM D-790 standard in a three-point bending mode at acrosshead rate of 0.5 mm/min using 130 × 12.7 × 1.6 mm CSBC and BSCC specimens. Four flexural tests were performed to ensure reliability of the test results.

To investigate the bending characteristics of the basalt / carbon / epoxy hybrid composite material, the stacking of the fiber order was accordingly carried out and FEM analysis was performed using a commercial FEM program. Pre-defined static loads on the bending specimen were applied to the model. Finite element analysis was conducted under a 2D plane stress state. The number of elements and nodes are 2,024 EA and

8,207 EA, respectively. The material properties are presented in Table 1.

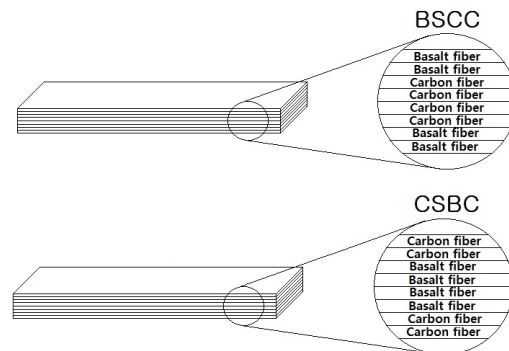


Fig. 1. Stacking sequence of composites

The Augmented Lagrange was adopted as contact algorithm and contact stat was rough conditions. The displacement was applied as load conditions

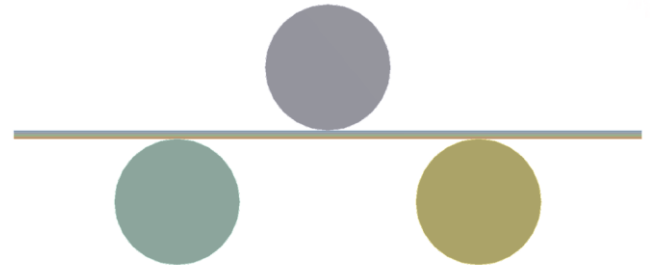


Fig. 2. Configuration of flexural test model

Table. 1 Mechanical properties of laminar

Properties	Carbon laminar	Basalt laminar
E _{xx}	45.30 GPa	11.29 GPa
E _{yy}	8.38 GPa	4.18 GPa
E _{zz}	45.30 GPa	11.29 GPa
G _{xy}	1.58 GPa	1.06 GPa
G _{yz}	1.58 GPa	1.06 GPa
G _{xz}	1.73 GPa	1.81 GPa
Y _{xy}	0.42	0.41
Y _{yz}	0.42	0.41
Y _{xz}	0.13	0.13

3. Results

The results from the test and FEA are compared in Fig. 3. In case of BSCC, the bending strength obtained from the test is 272Mpa and it from the FEA is 266Mpa, showing a difference with about 2%. Whereas, the bending strength for CSBC sample is 362Mpa in the test and 352Mpa in the FEA, respectively. Similar to BSCC, the results of CSBC also displays a 2% difference.

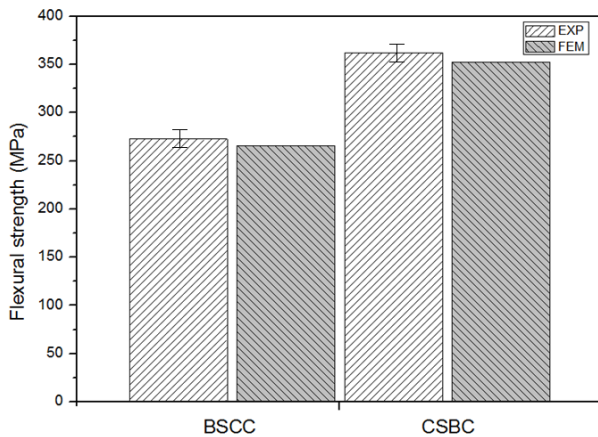


Fig. 3. Comparison of flexural strength of experiment and finite element results

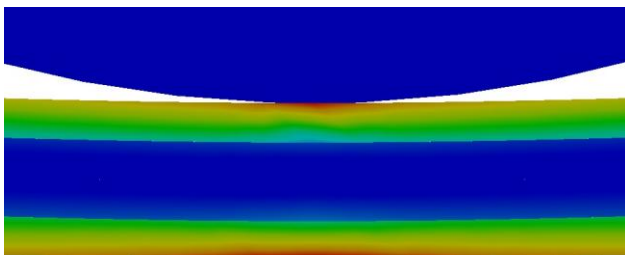


Fig. 4. Stress distribution of CSBC composite

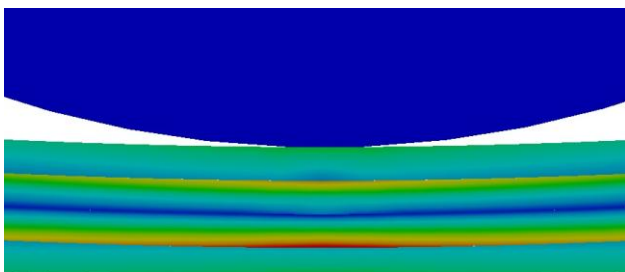


Fig. 5. Stress distribution of BSCC composite

4. Conclusions

A FEA analysis model has been successfully developed in order to predict flexural behavior of basalt/carbon/epoxy hybrid composites. The simulation using the FEA model produces a similar flexural strength to that obtained from the experiment. Therefore, the developed FEA model in general will be highly useful for the prediction of stacking sequence of basalt/carbon/epoxy hybrid composites for several industrial applications.

REFERENCES

- [1] V.I. Gulik and A.B. Biland, The Use of Basalt, Basalt Fibers and Modified Graphite for Nuclear Waste Repository - 12150, WM2012 Conference, 2012.
- [2] P. Banibayat, Anil Patnaik, Variability of mechanical properties of basalt fiber reinforced polymer bars manufactured by wet-layup method, Materials & Design, Vol.56, p. 898, 2014.
- [3] T. M. Borhan, Properties of glass concrete reinforced with short basalt fibre, Materials & Design, Vol.42, p.265, 2012.
- [4] M.T. Kim, M.H. Kim, K.Y. Rhee and S.J. Park, Study on an oxygen plasma treatment of a basalt fiber and its effect on the interlaminar fracture property of basalt/epoxy woven composites, Composites Part B: Engineering, Vol.42, p.499, 2011.
- [5] M.T. Kim, K.Y. Rhee, H.J Kim and D.H. Jung, Effect of moisture absorption on the flexural properties of basalt/CNT/epoxy composites, Carbon Letters, Vol.13, p.187, 2012.
- [6] X. Wanga, B. Hua, Y. Fenga, F. Lianga, J. Mo, J. Xiong, and Y. Qiu, Low velocity impact properties of 3D woven basalt/aramid hybrid composites, Composites Science and Technology, Vol.68, p. 444, 2008.
- [7] V. Fiore, G. Di Bell and A. Valenza, Glass- basalt/epoxy hybrid composites for marine applications, Materials & Design, Vol.32, p.2091, 2011.