

Aerosol Loss Calculation in KAERI's Steam Generator Tube Rupture Experimental Set-up

December 16-18, 2020

Changwon, Korea

Myeong Seon Lee, Hyo Jin Lee, Kwang Soon Ha and Sung Il Kim

CONTENTS



01 Research Background

02 SGTR Experimental Facility

03 Aerosol Loss Calculation

04 Results

05 Conclusion

01 Research Background

- There are a lot of studies on the SGTR accident probability to increase a safety of nuclear power plant
- Steam generator tube rupture (SGTR) accident is one of the most important accident scenarios should be considered to ensure regulations on the severe accident
- In order to evaluate risk of fission product during SGTR accident with domestic steam generator, steam generator experimental facilities were installed in KAERI
- In order to evaluate the aerosol decontamination factor inside steam generator accurately, it is necessary to understand the aerosol removal rate in the experimental facilities, such as pipes.
- In the study, aerosol loss calculations were performed to understand other uncertain factors affecting the aerosol removal rate inside the experimental facilities using calculation tools.

02 STGR Experimental Facility

• SGTR Experiment

- SGTR experimental facilities in KAERI were installed, and a lot of aerosol experiments have been performed. (left figure below)
- Properties of aerosol, such as aerosol size distribution, mass concentration were measured using aerosol sampling system (right figure) right after adding the aerosol.
- The measuring point of aerosol mass concentration is right after the mixing chamber, but the aerosol mass concentration right before the entrance of SGTR vessel is necessary to calculate decontamination factor exactly.
- The aerosol loss calculation is essential to increase the reliability of the experiment results.

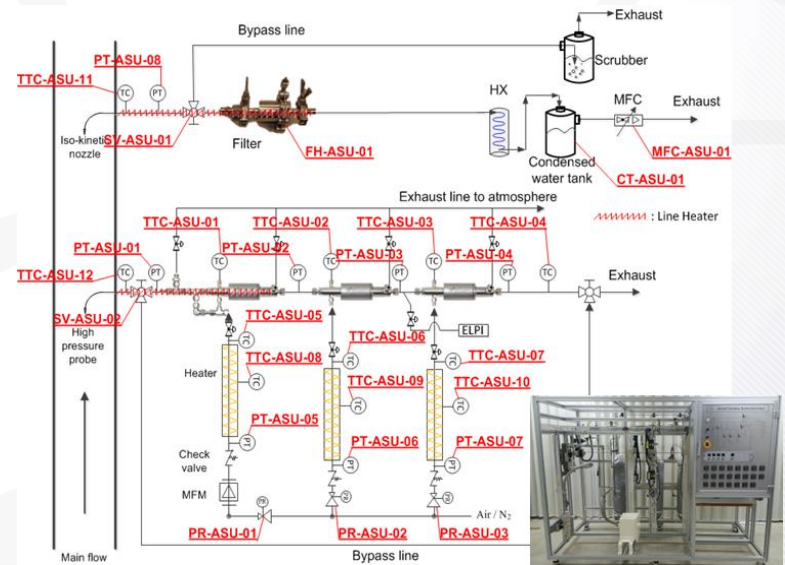
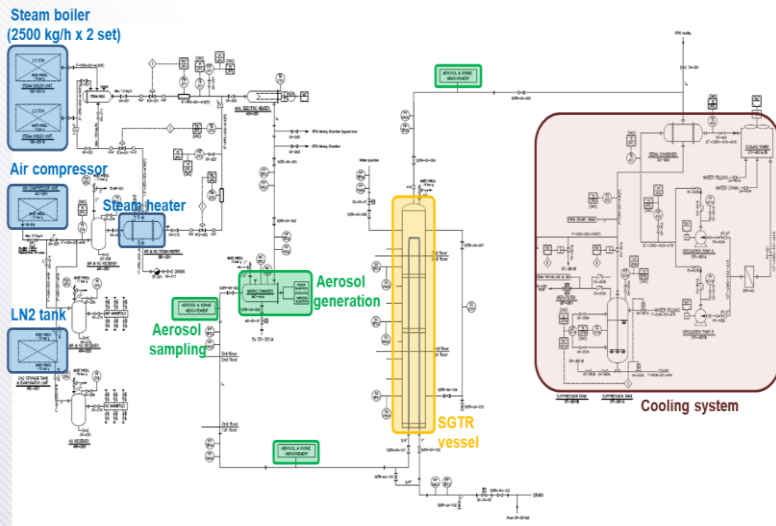



Fig. Aerosol experimental facility in KAERI

Fig. Schematics of aerosol sampling system

03 Aerosol Loss Calculation

- Particle Loss Calculator

- A software to assess the aerosol removal behavior inside facility including pipes

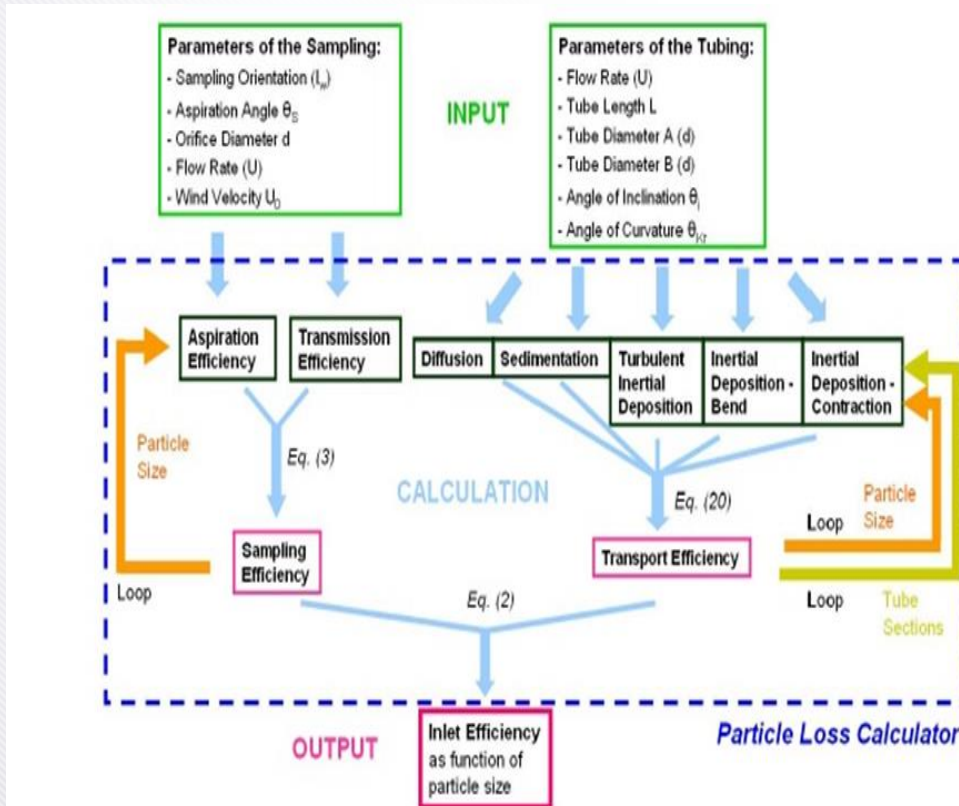

$$(\text{Inlet Efficiency}) = (\text{Sampling Efficiency}) \times (\text{Transport Efficiency})$$

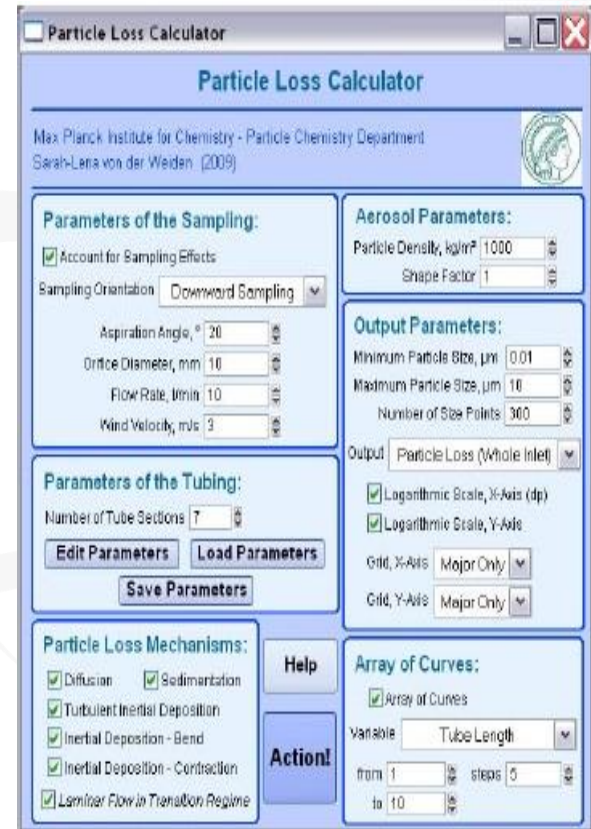


Fig. Use interface of the Particle Loss Calculator

Fig. Basic working principle of the Particle Loss Calculator

03 Aerosol Loss Calculation

- **Aerosol Loss Calculation**

- To calculate aerosol loss inside pipes, commercial particle loss calculator was used, Igor Pro 6.37
- The software employs relevant empirical and theoretical relationships found in established literature and accounts for the most important sampling and transport effects.
- To use the software, geometrical information of the experimental facilities should be inserted including pipe inner diameter, length, bend.
- In addition, thermo-hydraulic conditions are also necessary, such as gas temperature, velocity, species. Aerosol information also should be considered, aerosol species, size, density.
- All data required to conduct calculation has been collected and it would be reflected in the aerosol loss calculation

Particle Loss Calculator

Particle Loss Calculator

Max Planck Institute for Chemistry - Particle Chemistry Department
Sarah-Lena von der Weiden-Reinmüller (2009)

Parameters of the Sampling:

Account for Sampling Effects

Sampling Orientation: Horizontal Sampling

Aspiration Angle, °: 0

Orifice Diameter, mm: 1

Flow Rate, l/min: 0.1

Wind Velocity, m/s: 0

Aerosol Parameters:

Particle Density, kg/m³: 1000

Shape Factor: 1

Parameters of the Tubing:

Number of Tube Sections: 1

Edit Parameters Load Parameters

Save Parameters

Particle Loss Mechanisms:

Diffusion Sedimentation

Turbulent Inertial Deposition

Inertial Deposition - Bend

Inertial Deposition - Contraction

Laminar Flow in Transition Regime

Help

Action!

Output Parameters:

Minimum Particle Size, μm: 0.01

Maximum Particle Size, μm: 10

Number of Size Points: 300

Output: Particle Loss (Whole I...)

Logarithmic Scale, X-Axis (dp)

Logarithmic Scale, Y-Axis

Grid, X-Axis: Major O...

Grid, Y-Axis: Major O...

Array of Curves:

Array of Curves

Variable: Flow Rate

from: 100 steps: 3

to: 200

Fig. Main parameters of particle loss calculator

04 Simulated Result

- **Boundary conditions**

- In order to calculate the aerosol loss inside SGTR facility, it is necessary to reflect the geometry of the facilities.
- In addition, major thermal-hydraulic conditions that was used as experiment conditions were also considered.

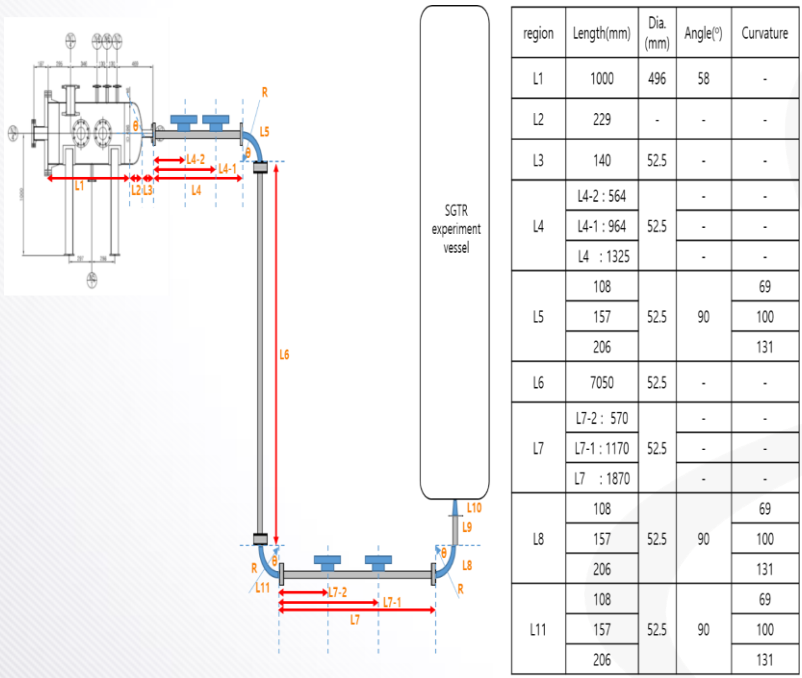


Table Thermal hydraulic conditions of SGTR experiment

Variables	Value
Flow rate	0.2 kg/s
Gas species	Nitrogen
Pressure	6 bar(a)
Temperature	423 K
Gas density	4.7698 kg/m ³

Fig. Geometrical information of SGTR facility

04 Simulated Result

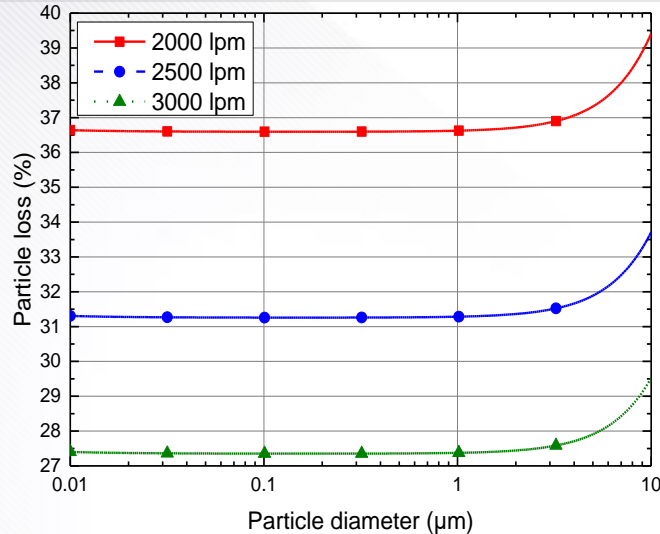


Fig. Particle loss with changing flow rate

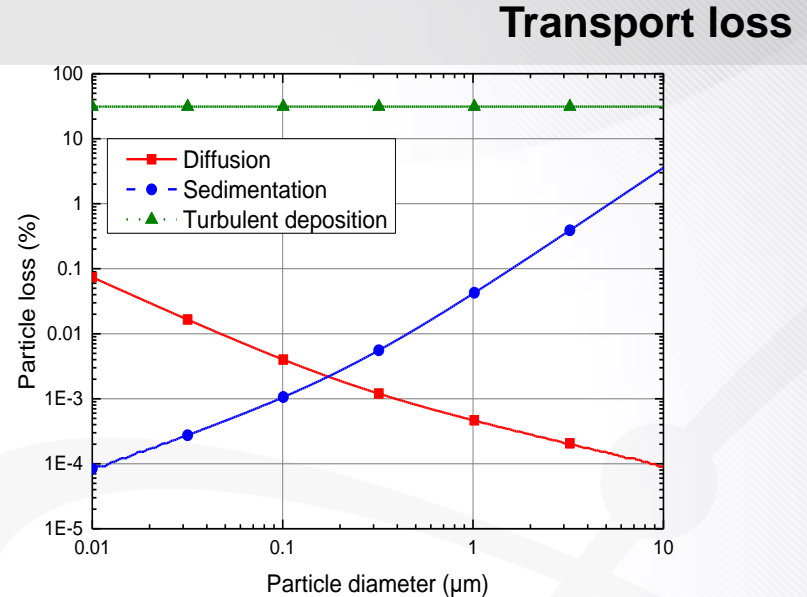


Fig. Particle loss mechanisms.

- In the sensitivity calculation of flow rate, it was found that particle loss increased in the case of small flow rate.
- In case of particle size of 0.7 μm, about 36.5% of aerosol would be removed in flow rate of 2000 lpm inside the SGTR experiment pipes. On the other hand, about 27.5% of aerosol would be eliminated in flow rate of 3000 lpm.
- Major factor to affect the aerosol loss in the flow regime is turbulent deposition loss. The turbulent inertial deposition is the inertial deposition loss of large particles due to the curved streamlines (eddies) in a turbulent flow.
- Large particles cannot follow the streamlines due to their high inertia and are deposited on the walls of the tube.

$$\eta_{\text{turb inert}}(d_a) = \exp\left(-\frac{\pi d L V_t}{Q}\right) \quad V_t = \frac{(6 \times 10^{-4} (0.0395 Stk Re^{3/4})^2 + 2 \times 10^{-8} Re) U}{5.03 Re^{1/8}}$$

04 Simulated Result

Transport loss

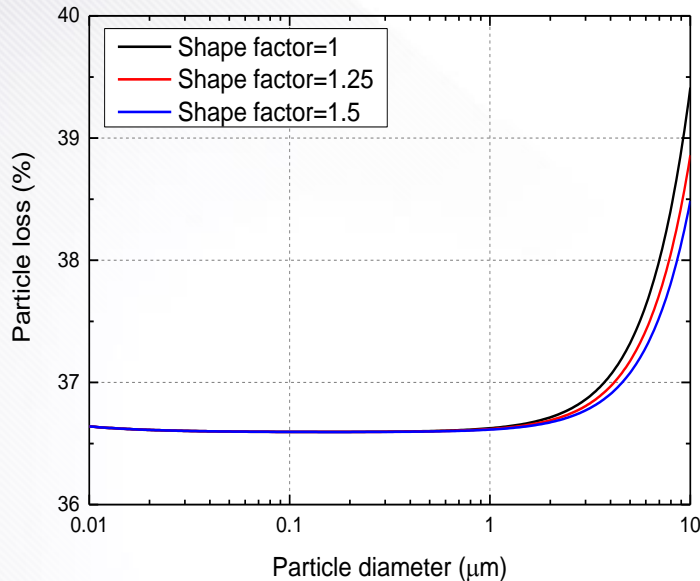


Fig. Particle loss with aerosol shape factor

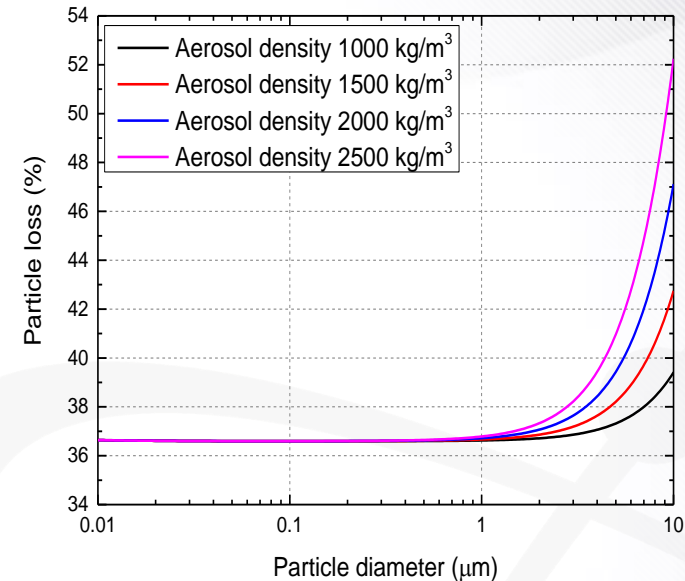


Fig. Particle loss with aerosol density.

- From the sensitivity studies on aerosol shape factor and density, it was found that the aerosol density is important factor to decide the particle loss inside the experimental setup. Especially, particle loss is important in case of large particle size, because of aerosol settling
- Shape factor also affects the particle loss in case of large particle size, however, the effect of the shape factor is not crucial as the factor of density

04 Simulated Result

Sampling loss

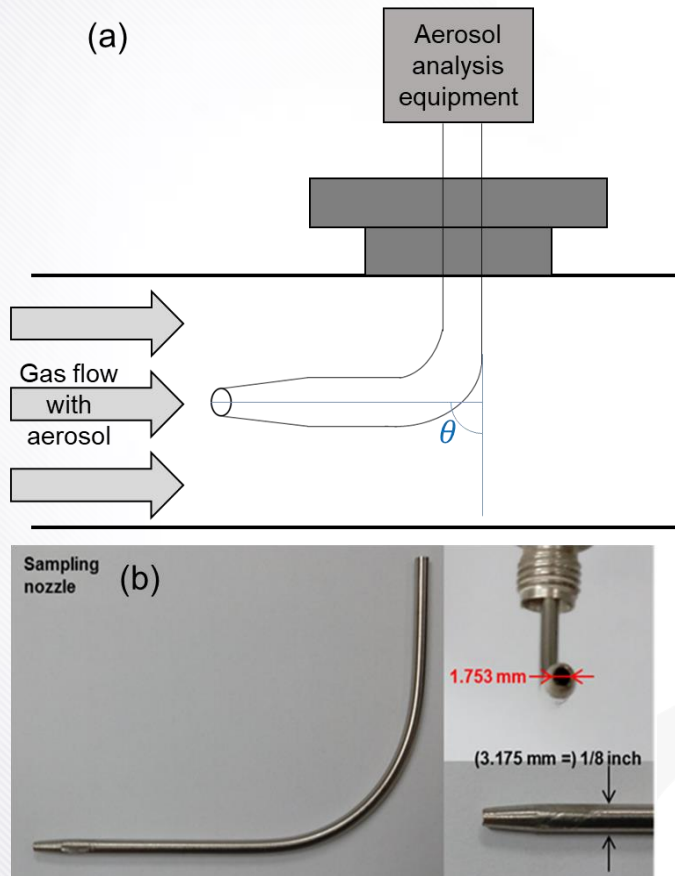


Fig. Aerosol sampling nozzle. (a) sampling loss with nozzle inclination (b) sampling nozzle used in KAERI's experiment

- Aerosol calculations for sampling nozzle also have been conducted by changing one of the three parameters, sampling flow rate, aspiration angle and orifice diameter in the aerosol sampling nozzle.
- In the **experiment condition**, sampling flow rate is set to satisfy iso-kinetic condition, however, the sampling flow rate could be varied with changing thermo-hydraulic conditions in flow inside pipe.
- Thus understanding the effect of sampling flow rate on particle loss could be important.

04 Simulated Result

Sampling loss

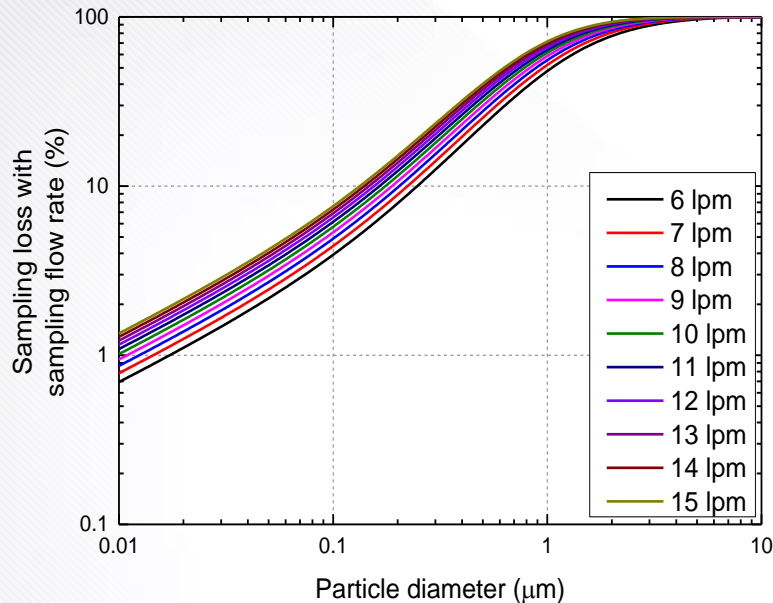


Fig. sampling loss with flow rate

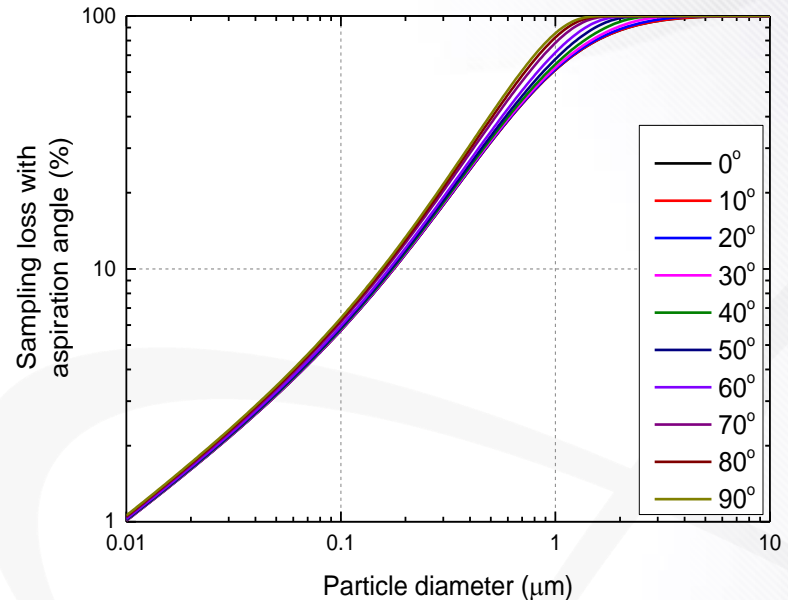


Fig. sampling loss with aspiration angle

- As increasing sampling flow rate, sampling loss is also increased. In particle size of 0.7 μm, the particle loss could be changed to about 20% from 6 lpm to 15 lpm of sampling flow rate.
- Aspiration angle of sampling nozzle is also one of the important factor to determine aerosol sampling efficiency.
- It is found that the sampling loss could be increased with changing aspiration angle in the particle size of 0.7 μm.

04 Simulated Result

Sampling loss

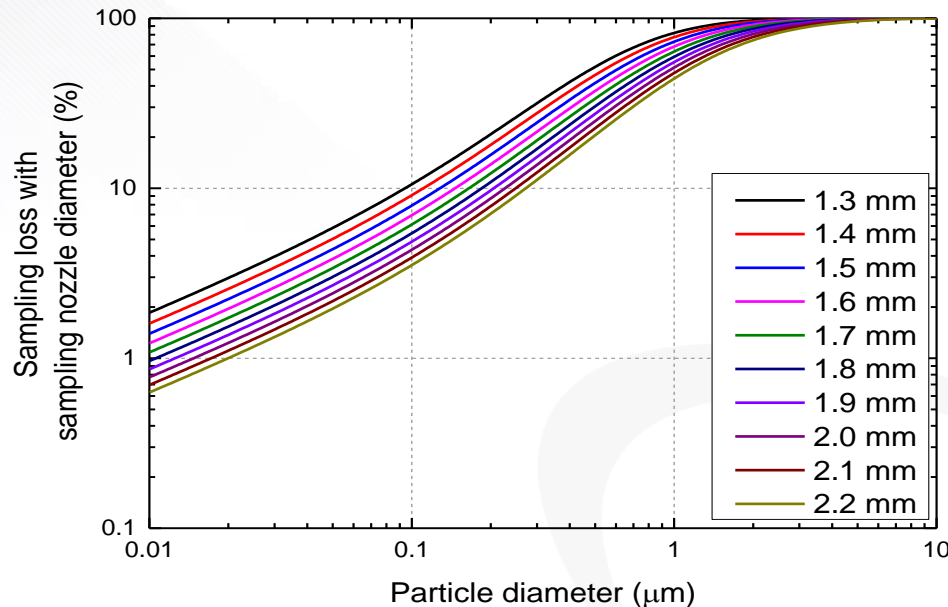


Fig. sampling loss with nozzle diameter

- The effect of sampling nozzle orifice diameter is also investigated.
- As increasing nozzle diameter, particle loss is decreasing with less wall resistance.
- However, to determine the sampling nozzle diameter, other factors should be considered, such as sampling flow rate, flow velocity.

05 Conclusion

- The effect of sampling loss and transport loss was found separately considering experimental conditions.
- It is confirmed that as increasing the angle between main gas flows in pipe and sampling nozzle, sampling loss increased.
- Sampling loss also increased as flow rate increased and the sampling loss is inversely proportional to the size of orifice diameter.
- Sensitivity calculation will be performed with considering other uncertain parameters to find out the effect of the factors.

THANK YOU