

Performance Evaluation of the KAERI Designed Spacer Grid Shapes for PWRs

Kee-Nam Song, a K-H Yoon, a J-Y Kim, a K-H Lee a
a Korea Atomic Energy Research Institute, P.O.BOX 105 Yusong, Taejon, KOREA

1. Introduction

In PWR fuel assemblies (FAs), spacer grids (SGs) are very important structural components for laterally and vertically supporting the nuclear fuel rods (FRs). Based on design experiences and by scrutinizing the design features of foreign advanced nuclear fuels and the foreign patents of SGs, KAERI has devised 16 kinds of SG shapes and has been applying for domestic and foreign patents since 1997. Mechanical/structural performance evaluation is carried out on two KAERI devised SG shapes, which are assumed to be the most effective candidates for the SG of the next generation nuclear FA in ROK, and also on two commercial SGs for the sake of a comparison.

2. Mechanical/Structural Performance Evaluations

The performance evaluation on two KAERI devised SGs and two commercial SGs were performed in detail. One of the KAERI devised SGs is a SG assembly with an optimized H-shape spring [1] as shown in Fig. 1. The spring shape was modified based on the H-shape spring [2] of which the main feature is a conformal contact shape at the contact part between the spring/dimple and the FR. To improve the performance of the H-shape spring, we adopted the systematic optimization design technique and obtained an optimized spring shape including the contact contour [3]. The other is the Doublet-type SG [4]. This SG is also modified based on the initial Doublet-type SG [5] of which the main feature is a support of the FR with a line contact.

We also selected two commercial SGs as references. One is widely used in the current commercial FA, which is designated in this paper as Ref. A. The other is a cutting-edge SG designated as Ref. B [6], whose shape of the supporting parts are similar to those of the KAERI devised SG with an Opt. H spring.




Figure 1 KAERI's SG springs (Left: Opt. H; Right: Doublet).

2.1 Patent-right of KAERI designed spacer grids

We have acquired US and ROK patents for the H-shape spring [2], the optimized H-shape spring [1], and the initial Doublet-type SG [5]. Recently we had also acquired US patent for the Doublet-type SG [4] and now it is under review for EC and ROK patents.

2.2 Spring Characteristics

Force-deflection tests on four kinds of SG springs were performed up to the plastic range. The tests were performed for springs which were defective by up to 1.0 mm. Test results in Ref. 7 showed that the stiffness of the KAERI devised SG springs were within the recommended stiffness range while that of Ref. A SG is not within the range. In addition, the elastic ranges were larger and the plastic sets were less for the KAERI devised springs when compared to those of the commercial SG springs.

2.3 Fuel Rod Vibration Characteristics

To investigate the FR support and vibration characteristics, a modal test of a single dummy FR supported by five SGs has been performed. The objective of this test is to compare the maximum deflection of each SG shape when the same input force is applied to the FR. Three kinds of input forces of 0.5, 0.75, and 1.0 N were used in the test. Similar tendencies were obtained for the other input forces. According to the result of 0.5 N, the maximum deflection for the springs are as follows; for the Doublet spring 0.08 mm, for the Opt. H spring 0.11 mm, and for Ref. B 0.128 mm as shown in Fig. 2. Because the maximum deflection is small, it means that the SG has a better vibration resistance to external forces and this leads to a greater resistance to a fretting wear damage. From the results we can draw a conclusion that the vibration characteristics for resisting a fretting wear for the KAERI devised springs are superior to that for Ref. B.




Figure 2 Fuel rod deflection vs. frequency.

2.4 Fretting Wear Characteristics

The fretting wear resistance test under a high temperature and high pressure condition was performed at AECL of Canada [7] in early 2004. The AECL wear resistance test at a reactor operation temperature to derive the FR wear coefficient for the PWR FR/the Opt. H SG was performed by using a sliding and impact wear tester. Table 1 shows the AECL wear test results of the Opt. H and Ref. B SG springs. According to Table 1, the wear resistance of the Opt. H SG spring is superior to that of the Ref. B SG spring, i.e. smaller wear coefficients (K) and also smaller maximum wear depths when compared to the Ref. B SG spring.

Recently another fretting wear test under room temperature conditions was performed at KAERI as the number of fretting cycles were increases to around 10^7 . The sliding distance for the test was set as $50 \mu\text{m}$. Fig. 3 shows the spring force (normal load) variation with the number of fretting cycles, and Table 2 compares the wear volume and maximum wear depth per 10^6 cycles. According to Fig. 3, the spring forces are on the decrease as the number of fretting cycles increases and the extent of a spring force decrease for Ref. B SG is greater than that for the KAERI designed SGs. According to Table 2, the wear volume and maximum wear depth for Ref. B SG are greater than those for the KAERI designed SGs.

Table 1 AECL results at spring (based on the Opt. H's value).

	Opt. H	Ref. B
Mean FR wear coefficient (K)	1.00	4.39
Max. FR wear mark depth	1.00	2.44

Table 2 KAERI's wear resistance test at spring(based on the Opt. H's value).

	Doublet	Opt. H	Ref. B
Volume	0.45	1.00	1.27
Maximum depth	0.92	1.00	1.18

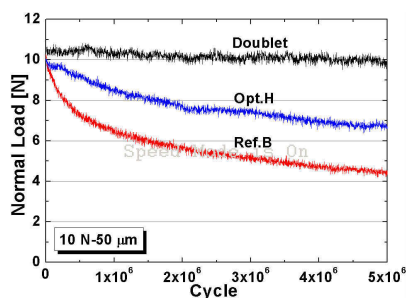


Figure 3 Normal load variation vs. fretting cycles.

2.5 CHF Characteristics

The critical heat flux (CHF) Freon test for the Opt. H and Ref. B SGs were performed at KAIST. The test results as shown in Fig. 4 show that the CHF

performance for Opt. H SG is better than that for Ref. B SG up to 3 %.

3. Conclusion

The mechanical/structural performance evaluation for two KAERI devised SG shapes which are assumed to be the most effective candidates for the SG of the next generation nuclear fuel assembly in ROK were carried out. Also the same tests for two commercial SGs were carried out as well. The results of the comparisons show that the performances of the KAERI devised candidates are superior or comparable to those of the commercial SGs from the aspects of the spring characteristics, fretting wear resistance, fuel rod vibration characteristics, and the CHF characteristic of the SGs.

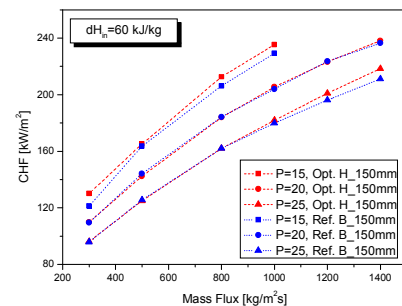


Figure 3 CHF vs. mass flux.

Acknowledgements

This project has been carried out under the nuclear R & D program by MOST (Ministry Of Science and Technology in Republic of Korea).

REFERENCES

- [1] K. H. Yoon, K. N. Song et al., Spacer Grid for Nuclear Fuel Assemblies with Grid Springs Maintaining Conformal Contact with Fuel Rods and Enlarged Elastic Range, US Patent US 6707872 B2, 2004.
- [2] K. H. Yoon, K. N. Song et al., Spacer Grid with H-spring for Fuel Rods for Use in Nuclear Reactor Fuel Assemblies, US Patent US 6167105, 2000.
- [3] K. N. Song et al., Shape Optimization of Spacer Grid Springs to Support Nuclear Fuel Rods, ICONE11-36500, 2002.
- [4] H. S. Kang, K. N. Song et al., Side-slotted Nozzle type Double Sheet Spacer Grid for Nuclear Fuel Assemblies, US Patent US 6744843 B2, 2004.
- [5] H. S. Kang, K. N. Song et al., Grid with Nozzle-type Coolant Deflecting Channels for Use in Nuclear Reactor Fuel Assemblies, US Patent US 6130927, 2000.
- [6] L. D. Smith et al., Nuclear Reactor with Improved Grid, US Patent US 6606369 B1, August 12, 2003.

[7] K-N Song et al., Performance Tests of KAERI
Designed Robust Spacer Grid Shapes for PWRs, KNS
Autumn Meeting, 2005.