

Feasibility Assessment of Cesium Removal using Microalgae

Ilgook Kim*, Byung-Gon Ryu, Bum-Kyoung Seo, Jei Kwon Moon, Jong-Won Choi
Korea Atomic Energy Research Institute, 1045 Daedeokdaero, Yuseong-gu, Daejeon, 305-353, Korea
*Corresponding author: ilgook@kaeri.re.kr

1. Introduction

Radioactive cesium (Cs^+) in the environment has been a matter of serious concern because of its long half-life (30 yrs) and high water solubility. Thus, hazardous quantities of Cs^+ will remain in the environment for centuries and living organisms easily absorb Cs^+ mistaking it for harmless potassium [1, 2]. Recently, increased attention has been directed on the use of biological technologies for the removal of radionuclides as the cheap and eco-friendly alternative to the non-biological methods. Metal including radioactive compounds uptake by microorganisms can be occurred by metabolism –independent and/or -dependent processes. One involves biosorption based on the ability of microbial cells to bind dissolved metals; on the other involves bioaccumulation, which depends on the metabolic ability of cells to transport metals into the cytoplasm. The purpose of this work is to investigate the feasibility of microalgae in bioaccumulation system to remove cesium from solution. The effect of different environmental parameters on cesium removal was also examined.

2. Methods and Results

2.1 Microalgae

All experiments were carried out with *Desmodesmus armatus* SCK, which was isolated from wastewater treatment plant as cesium-accumulating microalgae. Cells used for the bioaccumulation system were cultured in TAP medium and incubated at 25 °C (Fig. 1).



Fig.1. Cultivation of prepared cells before Cs^+ removal tests.

2.2 Cs^+ removal experiments

For Cs^+ uptake tests, cells in the early stationary growth phase were collected by centrifugation and then suspended in 20mM Tris buffer solution containing CsCl with 1 g/L biomass loading. All cell suspensions were incubated at 25 °C with rotary shaking (120 rpm). In order to measure the Cs^+ concentration, the medium was filtered through 0.2 micron filter and analyzed by inductively coupled plasma-mass spectrometry (ICP-MS). The Cs^+ removal efficiency was calculated as the difference in the Cs^+ concentration in the medium at initial and final condition.

2.3. Assessment of Cs^+ removal by *D. armatus* SCK

First of all, *D. armatus* SCK, cultivated in nutrient broth media amended with Cs^+ , were able to survive Cs^+ concentration as high as 1 mM.

As shown in Fig. 2, Cs^+ uptake of the *D. armatus* SCK increased with increasing the initial Cs^+ concentration and reached a saturated value at 500 μM . Maximum equilibrium uptake of Cs^+ ions was determined as 280 μM showing 70% removal efficiency at 400 μM .

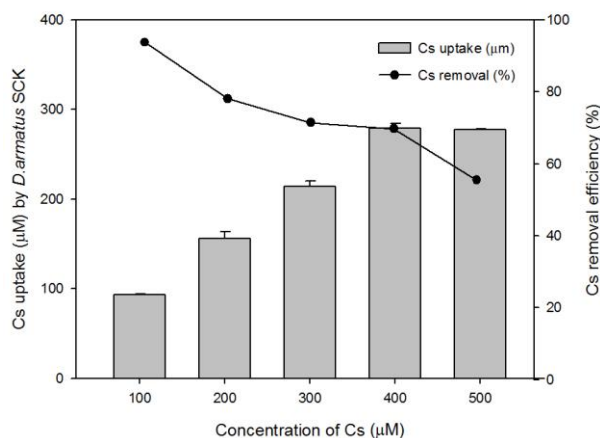


Fig.2. Cs^+ uptake by *D. armatus* SCK with Cs concentration.

The chemical similarity of Cs^+ and other alkali monovalent cations, in particular K, is the key factor that governs the high mobility of Cs^+ in biological systems [4]. Cs^+ accumulation by *D. armatus* SCK was decreased at high K^+ concentrations as shown in Fig.3, which can be explained by the inhibitory effects of K on microalgal Cs^+ uptake. In fresh water, however, K^+ concentrations are generally below 3 mg/L, and thus the inhibition of Cs^+ uptake by K^+ could be neglected.

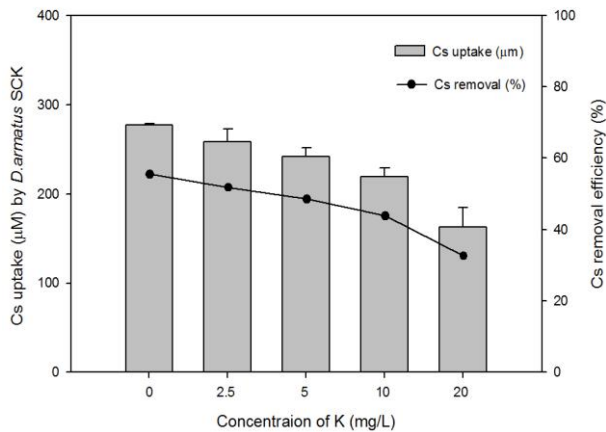


Fig.3. Effect of potassium (K^+) on Cs^+ uptake by *D. armatus* SCK.

3. Conclusions

The aim of this work is to assess the feasibility of selected one of microalgae in the uptake of Cs^+ . The obtained results showed the maximum Cs^+ removal by *D. armatus* SCK was $280\mu M$ indicating 70% removal efficiency. Also, *D. armatus* SCK could uptake Cs^+ in the presence of K^+ , is particularly known to be transported into cells as an analog of Cs^+ in freshwater condition.

REFERENCES

- [1] N. Tomioka, K. Tanaka, H. Uchiyama, O. Yagi, and E. Kokufuta, Recovery of ^{137}Cs by a bioaccumulation system using *Rhodococcus erythropolis* CS98, Journal of Fermentation and Bioengineering, Vol. 85, p. 604-608, 1998.
- [2] R. Jalali-Rad, H. Ghafourian, Y. Asef, S.T. Dalir, M. H. Sahafipour, and B. M. Gharanjik, Biosorption of cesium by native and chemically modified biomass of marine algae: introduce the new biosorbents for biotechnology applications, Journal of Hazardous Materials, Vol.116, p.125-134, 2004.
- [3] A. Kapoor and T. Viraraghavan, Fungal biosorption- An alternative treatment option for heavy metal bearing wastewaters: A review, Bioresource Technology, Vol. 53, p. 198-206, 1995.
- [4] S. V. Avery, Caesium accumulation by microorganisms: uptake mechanisms, cation competition, compartmentalisation and toxicity, Journal of Industrial Microbiology, Vol. 14, p.76-84, 1995.